


Luna II H

(ST-001)

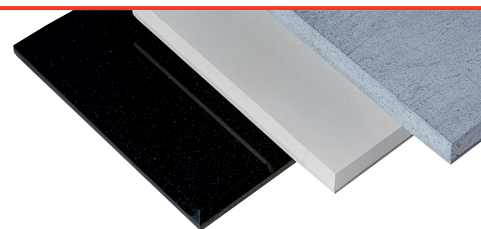

Elegance comes in many forms – and sizes.

Luna II H takes the distinctive design of Luna II L and lifts it to new heights, both literally and figuratively. Its increased height and extended cladding give it a slim, elegant profile that works particularly well in rooms with high ceilings, naturally drawing the eye upwards. While the stove delivers a soft, even warmth throughout the room, the integrated warming compartment offers added convenience for keeping food and drinks warm.

Like its more compact sibling, Luna II H is crafted from solid cast iron and is available in serpentine, cream white or black stone, making it well suited to a wide range of interiors.

Technical Data

Efficiency : 75,7 %
 Nominal heat output : 7,9 kW
 Heat output range : 6,5- 9 kW
 1. BlmSchV - Stufe 2 : Fulfilled
 Ecodesign 2022 : Fulfilled


Flue gas temperature : 281 °C
 Flue gas temp. at the collar : 337 °C
 Flue gas mass flow : 8,7 m (g/s)
 Flue draught : 12,0 Pa
 Mean CO₂-concentration : 8,43 %

Energy efficiency class:

A

Luna II H

Drawings, measurements and technical information

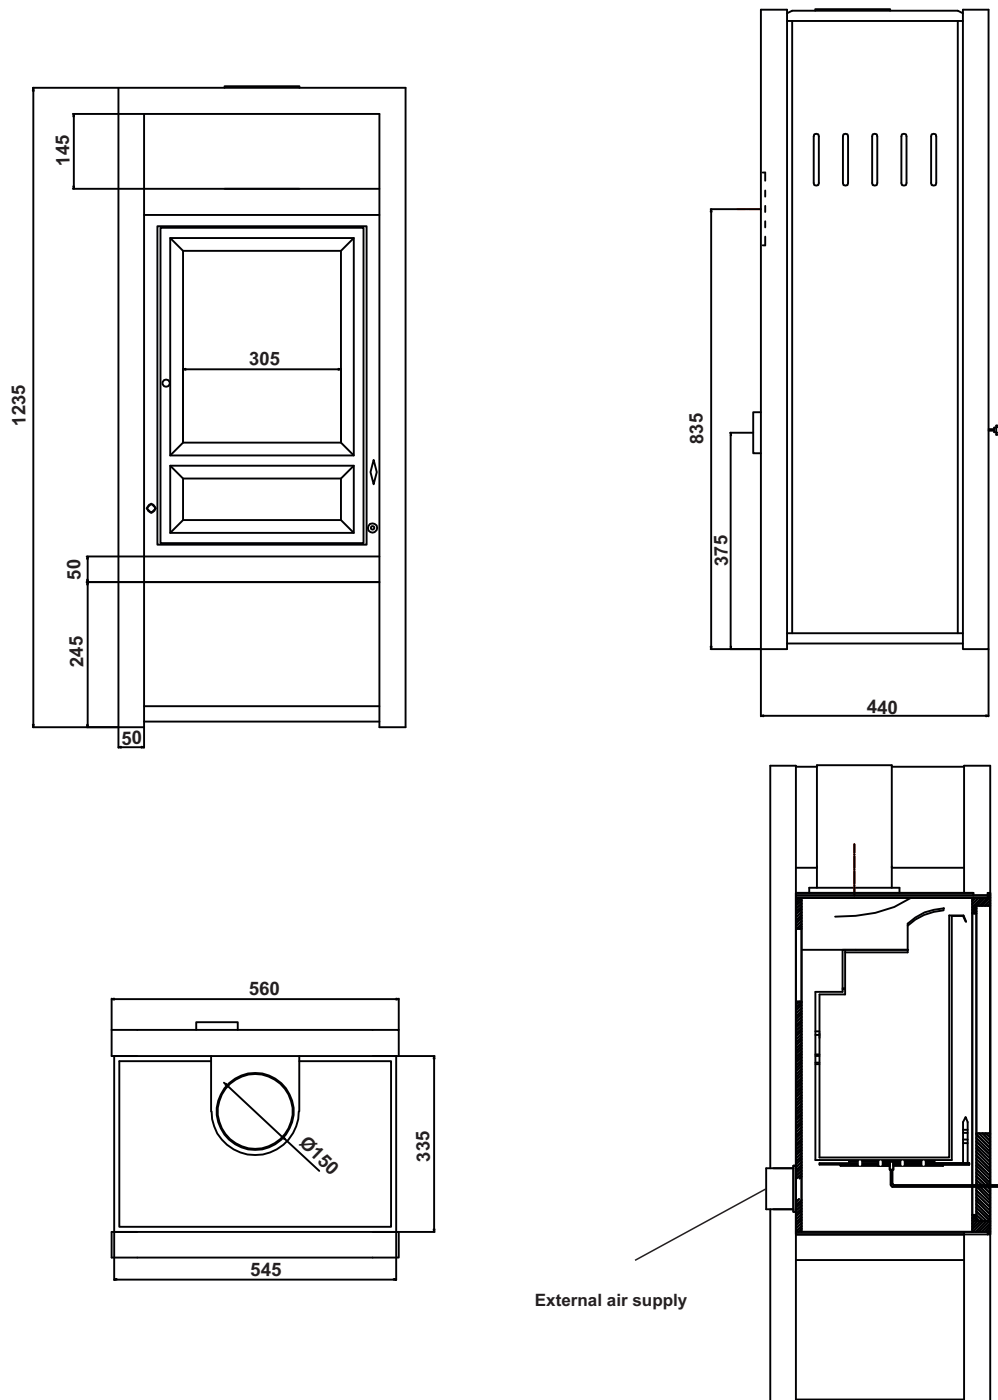

Extra details/Technical information

Measurements in mm HxWxD	Combustion chamber in mm HxWxD	Stove window in mm HxW	Door opening in mm HxW	Colour	Combustion chamber material	Weight	Flue collar $\varnothing$ in mm	Flue collar exit
1230x563x445	450x295x275	370x305	350x295	Black	Cast Iron	ca. 230 kg	150	Top /Rear
Fuel	Air control	Primary air	Secondary air	Tertiary air	Rotating grate	Ash pan	<i>Bauart</i>	Type of appliance
Wood	Primary air slider Secondary air slider	Yes	Yes	Yes	Yes	Yes	Type 1 (self-closing door)	Intermittent
Emissions	CO: ≤ 1250 mg/m ³		NOx: ≤ 200 mg/m ³		OGC: ≤ 120 mg/m ³		Dust (PM): ≤ 30 mg/m ³	