

Eros II (ST-2800)



Eros II is a stove of distinctive, storybook charm. It draws on the design of Eros I, yet possesses an identity entirely its own. Its twin front doors, each with a viewing window, open like theatre curtains to reveal the captivating flames within. Behind this striking display, the latest combustion technology works quietly and efficiently, delivering clean, reliable performance. Meanwhile, the right-hand side door allows logs of up to 33 cm in length to be added with ease. For those who appreciate a more lush appearance, the top plate can be fitted with polished chrome spheres – an optional accessory that delivers a refined finish. Alternatively, the stove is also available as Eros I, with a single front door and a left-hand side door.

Technical Data

Efficiency : 77,6 %
 Nominal heat output : 7,7 kW
 Heat output range : 6,5 - 8,5 kW
 1. BlmSchV - Stufe 2 : Fulfilled
 Ecodesign 2022 : Fulfilled


Flue gas temperature : 282 °C
 Flue gas temp. at the collar : 338 °C
 Flue gas mass flow : 7,6 m (g/s)
 Flue draught : 12,1 Pa
 Mean CO₂-concentration : 9,12 %

Energy efficiency
 class:

A

Eros II

Drawings, measurements and technical information

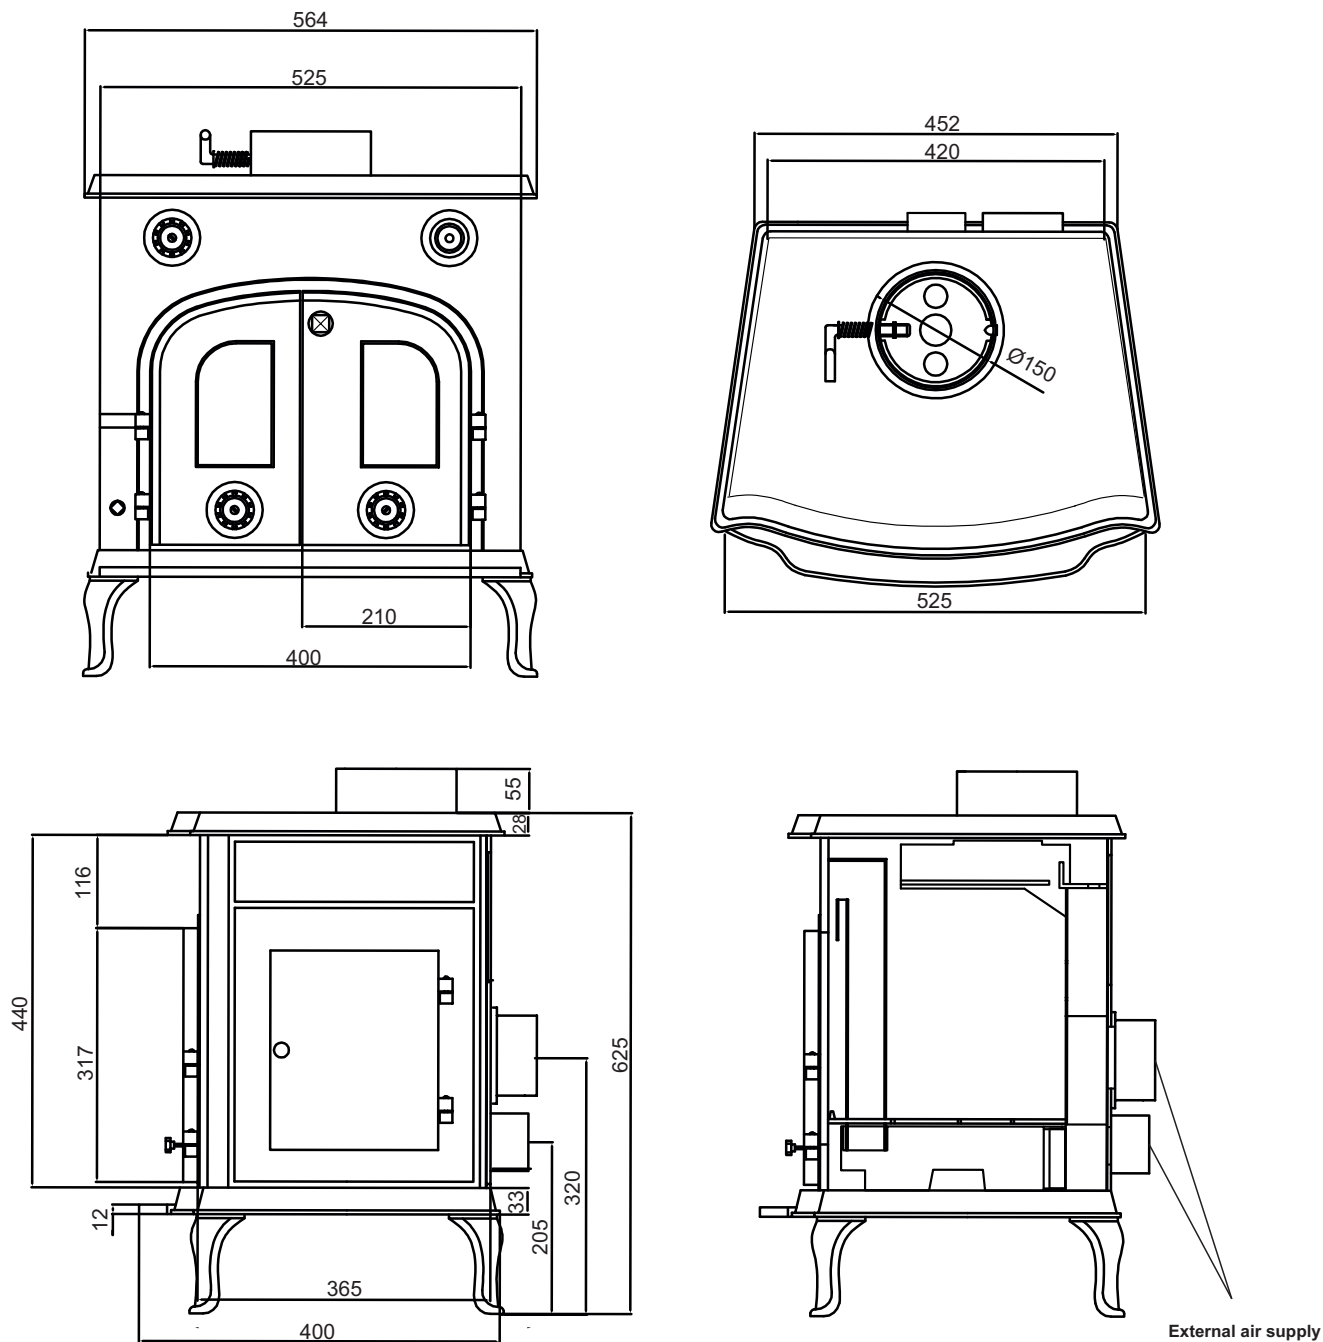

Extra details/Technical information

Measurements in mm HxWxD	Combustion chamber in mm HxWxD	Stove window in mm HxW	Door opening in mm HxW	Colour	Combustion chamber material	Weight	Flue collar Ø in mm	Flue collar exit
680x525x450	355x410x260	85x150 (2x)	180x200	Black	Cast Iron	ca. 125 kg	150	Top /Rear
Fuel	Air control	Primary air	Secondary air	Tertiary air	Rotating grate	Ash pan	Bauart	Type of appliance
Wood	Primary air slider Secondary air slider	Yes	Yes	Yes	Yes	Yes	Type 1 (self-closing door)	Intermittent
Emissions		CO: ≤ 1250 mg/m ³		NOx: ≤ 200 mg/m ³		OGC: ≤ 120 mg/m ³		Dust (PM): ≤ 40 mg/m ³