

Herculina XXL



Model Herculina 670 XXL

The Herculina XXL can be proud of its name.

With its broad base and granite slabs and in combination with the solid cast iron floor base, this is a robust stove which would take its place in your room as a real piece of furniture.

The warm wood compartment and the wide base helps to create a cosy and homely atmosphere. Fitted with the latest technology it is a treat to light the fire.

It is fitted with a fire/rotating grid and is regulated using only one control.

In the Herculina range there are two other models available: XL and S.

Technical Information

Efficiency	: 80,3 %	Tested capacity	: 7 kW
Weight	: 254 Kg	Flue gas flow Wood	: 12,6 m (g/s)
Flue connection	: 150 mm	Pressure	: 12 p (Pa)
Flue gas temperature Wood	: 316 °C	Dust in mg.	: 37 mg/Nm ³
Capacity	: 6-8 kW		




Energy rating:




Tested according to the following standards: gem. Art. 15a B-VG, BStV München, Regensburg, Stuttgart and Aachen, gem. DIN plus, Ö-Norm, CE norm, 1.+2. BimschV. and Luftreinhalte-Verordnung Switzerland.

Herculina XXL

Drawings, measurements and technical information

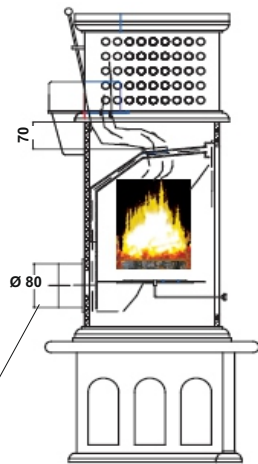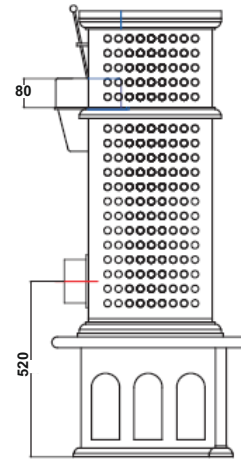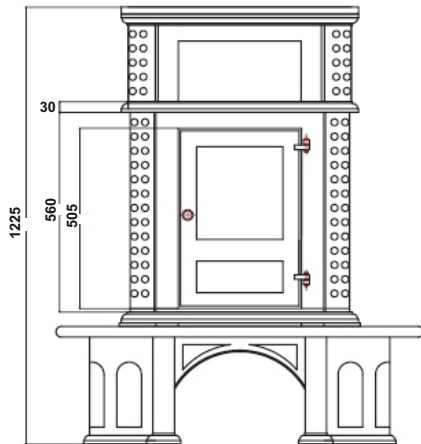

External air flow

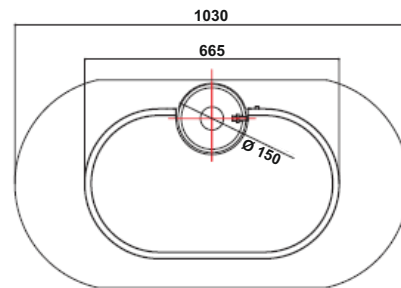


Extra Details / Technical Information

Measurements in mm HxWxD	Fire place mm HxWxD	Fire opening in mm HxW	Stove window HxW	External air flow	Design	Fleu height pipe	1+ 2 BimschV	Capacity in cbm	Tested according	
1225x1030x540	350x350x260	260x300	270x230	yes	A1	995	yes	180	13240	
Colour	Inside of fire	Fuel	Continuing/ time burning	Fire rotation grip	Ash pan	Fire/rotating grid	Primary air	Secondary air	O-Norm	Clean air act Switzerland
Black	Cast Iron	Wood/coal	Time burning	yes	yes	yes	yes	yes	yes	yes
Dust in Mg on 13% O2: 37 mg/Nm ³		NOX: 128 mg/Nm ³		CO: 1250 mg/Nm ³		OGC: 75 mg/Nm ³		Anf. der Städte München, Aachen Stuttgart und Regensburg nach DIN plus		
Values converted: 24 mg/MJ		81 mg/MJ		753 mg/MJ		48 mg/MJ				

- Globe fire -

Globefire Ch.Leibfried GmbH, An der Bundesstraße 2,
D-49733 Haren / Ems, Germany

Tested stove Type 1: EN 13240: 2001+A2: 2007

Type	Stove Herculina ST 670BA		
Declaration of performance Nr.	007-CPR-2013.06.10		
Test institute Number	1625		
Test-Nr.	RRF - 40071506		
Heat output / Energy efficiency	Fulfilled		
.Efficiency	80,3 %		
.Nominal heat output	7 kW		
.Room efficiency	7 kW		
.Heat output	6 - 8 kW		
Mechanic solidity	Fulfilled		
Surface temperature	Fulfilled		
Combustion products	CO-Emission: 1250 mg/Nm ³ - 753 mg/MJ		
.Flue gas temperature	245 °C		
Fire safety	Fulfilled		
.Fire behavior	A1		
.Minimal distance to flammable materials:	Side: 20 cm Rear: 20 cm Bottom: 0 cm Front stove window: 80 cm		
Fuel	Wood and coal	Time burning	
Dust in Mg on 13% O ₂ : 37 mg/Nm ³	Nox: 128 mg/Nm ³	CO: 1250 mg/Nm ³	OGC:75 mg/Nm ³
Values (converted): 24 mg/MJ	81 mg/MJ	753 mg/MJ	48 mg/MJ
VKF Switzerland	25293		
Reading and follow up of given guidelines in the manuel			
The connection of more stoves to one chimney is permitted			

Approved German tests and CE mark EN 13240:2001 + A2:2007, according DINplus and also according Art. 15A B-VG Ö-Norm Austria.
1. and 2. level 1. BimschV Germany and also Luftreinhalte-Verordnung Switzerland.