

Janice



Model Janice

With a depth of only 23 cm the Janice takes up very little room space.

When the Janice is burning the high window gives a good view of the flames adding a pleasant touch to this sleek and straight-lined pellet stove.

The stove has a tank capacity of 15 Kg.

The chimney connection can be made on the right hand side and also at the back.

Technical Information

Efficiency	: 95	%	Tested capacity	: 6,5	kW
Weight	: 69	Kg	Flue gas flow wood	: 6,2	m (g/s)
Flue connection	: 80	mm	Pressure	: 10	p (Pa)
Flue gas temperature Wood	: 184	°C	Storage tank size	: 15	Kg
Capacity	: 3-7,5	kW			


Energy rating:



Tested according to the following standards: gem. Art. 15a B-VG, BStV München, Regensburg, Stuttgart and Aachen, gem. DIN plus, Ö-Norm, CE norm, 1.+2. BimschV. and Luftreinhalte- Verordnung Switzerland.

Janice

Drawings, measurements and technical information

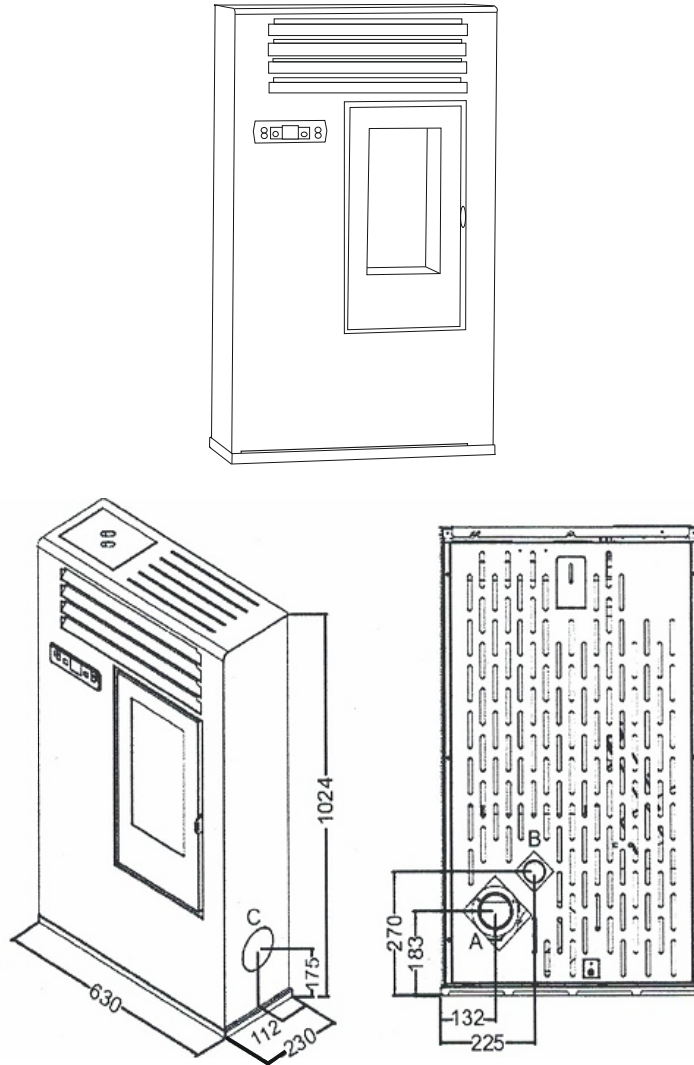

Extra Details / Technical Information

Measurements in mm HxWxD	Secondary air	Design	1+ 2 BimschV	Tested according	Ö-Norm	Clean air act Switzerland	Capacity in cbm	
1020x625x230	yes	1	yes	14785	yes	yes	160	
Colour	Inside of fire	Outside	Fuel	Storage Tank size	Weight	Ash pan	Grate	Fully automatic
Black	Steel	Steel / Powdercoated	Woodpellets	15 Kg	60 Kg	yes	yes	yes
Dust in Mg on 13% O2: 19 mg/Nm ³			NOX: 131 mg/Nm ³		CO: 128 mg/Nm ³		OGC: 10 mg/Nm ³	

- Globe fire -

Globefire Ch.Leibfried GmbH, An der Bundesstraße 2,
D-49733 Haren / Ems, Germany

Pellet stove: EN 14785:2006
Heating in a building without heating and without
using warm water systems

Type	JANICE
Declaration of performance Nr	017-CPR-2019 02.20
Test institute number	IMQ SPA NB 0051
Test-Nr.	CS 17-0015 202-01
Heating capacity /energy performance	Achieved
.Performance	Nominal capacity: 88,5 % Shared capacity: 90,5 %
.Capacity	Nominal capacity: 6,5 kW Shared capacity: 3,0 kW
.Heating capacity	3,4 - 7,5 kW
Mechanical solidity	Achieved
Surface temperature	Achieved
Emission combustion products (at 13% O ₂)	CO: 123 mg/Nm ³ NOX: 131 mg/Nm ³
.Flue gas temperature	184 °C
Burning reliability	Achieved
.Method of burning	A1
.Minimal distance to flammable parts:	Side: 30 cm Back: 20 cm Bottom: 0 cm Front stove window: 100 cm
Fuel	Wood pellets
Voltage: 230 V Frequency: 50Hz Nominal capacity Max. 360 W	LED
Read and follow the given instructions in the user's manual	
Tested according to DIN EN 14785:2006, 15A B-VG/ VKF 2nd phase of the BimschV Germany	
