

Neptune

(ST-244)



Whether you're heating a large living space or counting on the stove as your main source of warmth – Neptune delivers.

This fully cast-iron stove makes an impression not just with its solid build, but with its versatility. Loading is easy and convenient: Neptune features both a front door and a side door on the right, which can accommodate logs up to 50 cm long.

The top cover includes an integrated cooking plate, so you can handle simple everyday cooking tasks directly on the stove.

The ash pan is accessible via a separate door, making ash removal fast and mess-free.

The stove is also equipped with a throttle valve and a rotating grate.

Technical Data

Efficiency : 75,3 %
 Nominal heat output : 9,2 kW
 Heat output range : 8-10,5 kW
 1. BImSchV - Stufe 2 : Fulfilled
 Ecodesign 2022 : Fulfilled


Flue gas temperature : 302 °C
 Flue gas temp. at the collar : 362 °C
 Flue gas mass flow : 9,7 m (g/s)
 Flue draught : 12,3 Pa
 Mean CO₂-concentration : 8,81 %

Energy efficiency
class:



Neptune

Drawings, measurements and technical information

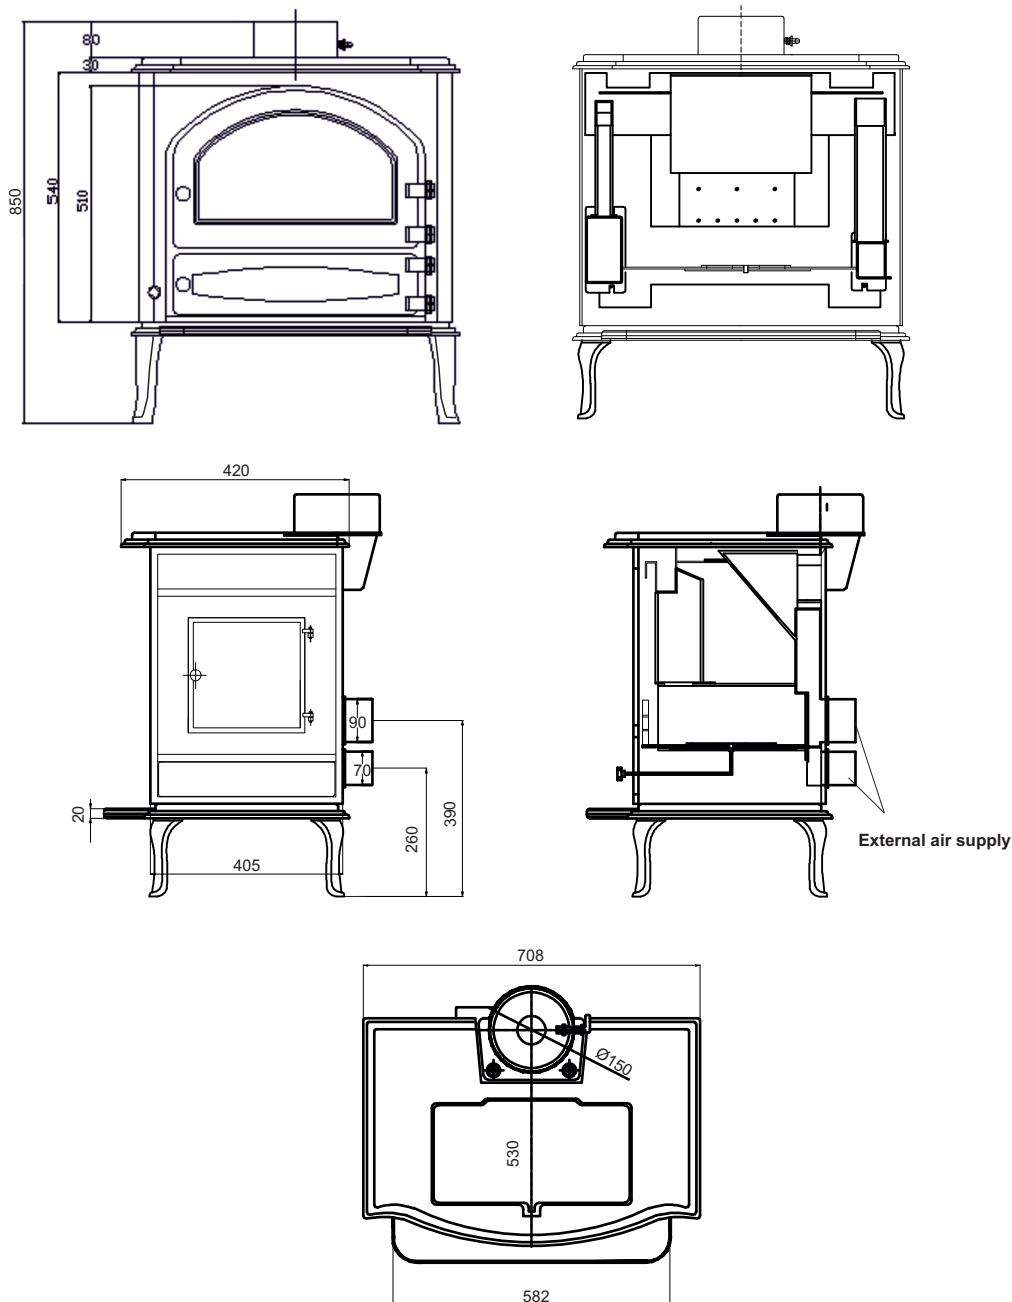

Extra details/Technical information

Measurements in mm HxWxD	Combustion chamber in mm HxWxD	Stove window in mm HxW	Door opening in mm HxW	Colour	Combustion chamber material	Weight	Flue collar Ø in mm	Flue collar exit
850x708x490	430x450x300	240x440	220x200	Black	Cast Iron	ca. 200 kg	150	Top /Rear
Fuel	Air control	Primary air	Secondary air	Tertiary air	Rotating grate	Ash pan	Bauart	Type of appliance
Wood	Primary air slider Secondary air slider	Yes	Yes	Yes	Yes	Yes	Type 1 (self-closing door)	Intermittent
Emissions		CO: ≤ 1250 mg/m ³		NOx: ≤ 200 mg/m ³		OGC: ≤ 120 mg/m ³		Dust (PM): ≤ 40 mg/m ³