

Herculina XS

(ST-670)



Herculina XS offers a clean, uncluttered look in a very compact form.

It's the smallest stove in the Herculina-series, perfect for rooms where you prefer a more understated presence.

Instead of standing on a base, it rests on elegantly curved legs. This open design makes the stove appear less bulky and gives it a lighter feel.

In use, it offers both efficiency and comfort. The XS gives off a pleasant radiant heat – that direct, tangible sense of wellbeing – while also producing convection heat that quickly circulates warm air around the room.

This model is part of the Herculina-series and also comes in the versions S, XL and XXL.

Technical Data

Efficiency : 76,1 %
 Nominal heat output : 6,1 kW
 Heat output range : 6 - 8 kW
 1. BlmSchV - Stufe 2 : Fulfilled
 Ecodesign 2022 : Fulfilled


Flue gas temperature : 294 °C
 Flue gas temp. at the collar : 353 °C
 Flue gas mass flow : 6,2 m (g/s)
 Flue draught : 12,0 Pa
 Mean CO₂-concentration : 9,07 %

Energy efficiency
class:



Herculina XS

Drawings, measurements and technical information

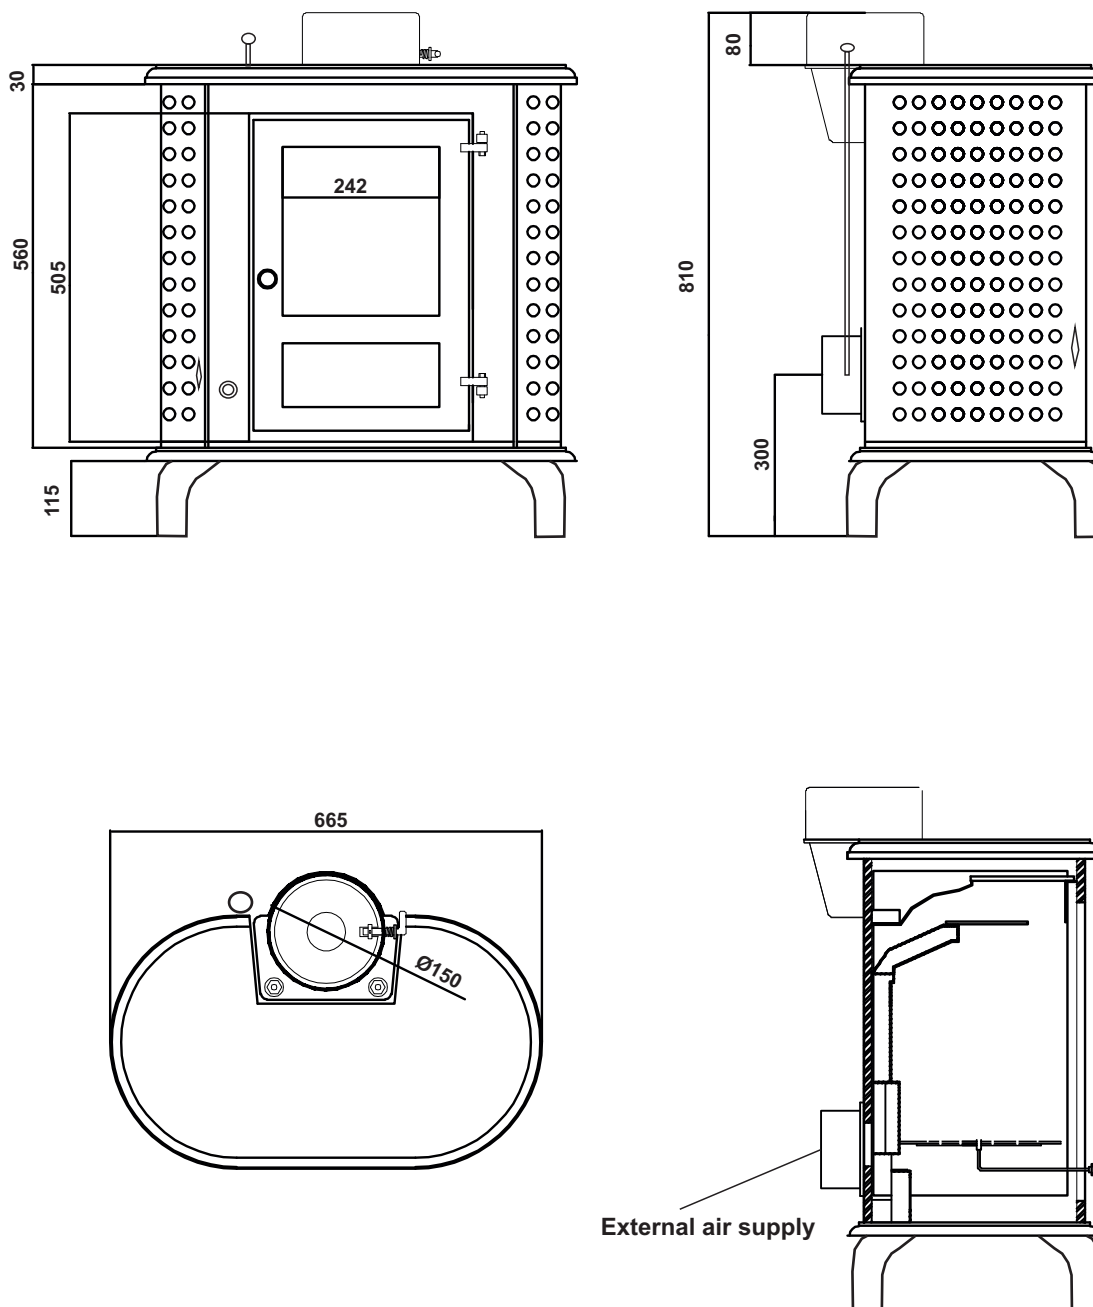

Extra details/Technical information

Measurements in mm HxWxD	Combustion chamber in mm HxWxD	Stove window in mm HxW	Door opening in mm HxW	Colour	Combustion chamber material	Weight	Flue collar Ø in mm	Flue collar exit
810x725x455	350x350x260	270x230	260x300	Black	Cast Iron	ca. 155 kg	150	Top /Rear
Fuel	Air control	Primary air	Secondary air	Tertiary air	Rotating grate	Ash pan	Bauart	Type of appliance
Wood	Primary air slider Secondary air slider	Yes	Yes	Yes	Yes	Yes	Type 1 (self-closing door)	Intermittent
Emissions		CO: ≤ 1250 mg/m ³		NOx: ≤ 200 mg/m ³		OGC: ≤ 120 mg/m ³		Dust (PM): ≤ 30 mg/m ³